


## DIFFUSE TYPE DOWN LIGHT

Recess mounted Circular type LED Down Light in white finish with energy efficient electronic driver.


- Input Voltage: AC 220 - 240V, 50/60Hz
- Optics: Polycarbonate diffuser
- High Surge Protection 1.0 KV
- Driver Type: Integral
- LED Life: 30,000 BH
- CRI: Ra>80
- P.F ≥ 0.5

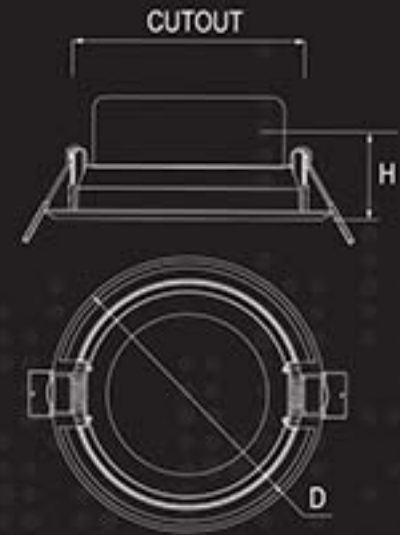

D = Diameter H = Height

### Application areas

- General Shops   Small Offices   Reception Area   Homes
- Restaurants   Hospital Lobbies & Passages




Wattage	Product Description	CCT	Lumen Output	Cut Out Dimension (mm)	Dimension (LxWxH) mm	Product Code
5W	LED Down Light	3000K	350lm	70 mm	86 x 86 x 46	PDLM12053
	LED Down Light	6000K	350lm	70 mm	86 x 86 x 46	PDLM12056

## LENS TYPE DOWN LIGHT

Recess mounted Circular type LED Down Light in white finish with energy efficient electronic driver.


- Input Voltage: AC 220 - 240V, 50/60Hz
- Optics: Polycarbonate Lens
- High Surge Protection 1.0 KV
- Driver Type: Integral
- LED Life: 30,000 BH
- CRI: Ra>80
- P.F ≥ 0.5

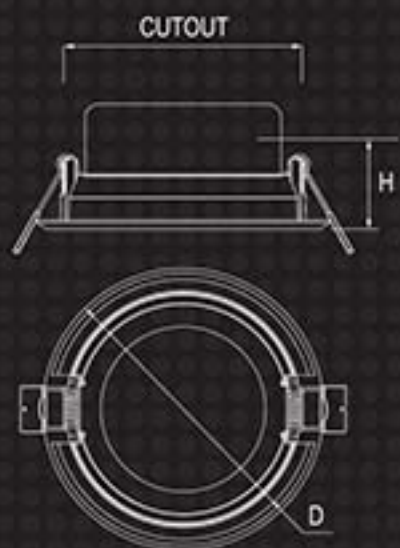

D = Diameter H = Height

### Application areas

- General Shops   Small Offices   Reception Area   Homes
- Restaurants   Hospital Lobbies & Passages



Wattage	Product Description	CCT	Lumen Output	Cut Out Dimension (mm)	Dimension (LxWxH) mm	Product Code
5W	LED Down Light	3000K	350lm	70 mm	86 x 86 x 46	PDLM13053
	LED Down Light	6000K	350lm	70 mm	86 x 86 x 46	PDLM13056



## LED DOWN LIGHT




Recess mounted Circular type LED Down Light in white finish with energy efficient electronic driver.

- Input Voltage: AC 220-240V, 50/60Hz
- Driver Type: Integral
- P.F ≥ 0.6
- High Surge Protection: 1.0 KV
- CRI: Ra>80
- LED Life: 15,000 BH
- Optics: Polycarbonate diffuser



### Application areas

- General Shops
- Small Offices
- Homes
- Restaurants
- Hospital Lobbies & Passages

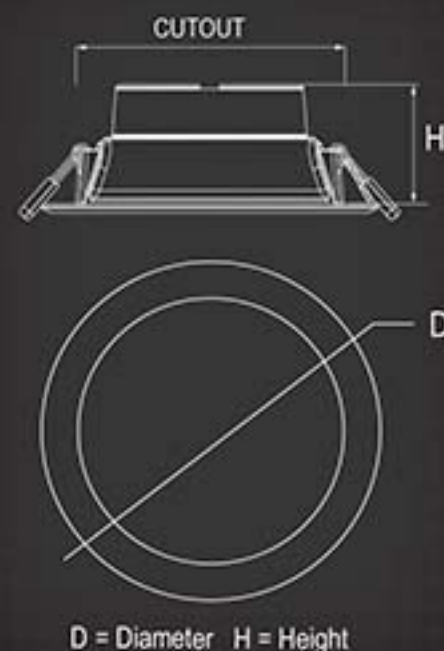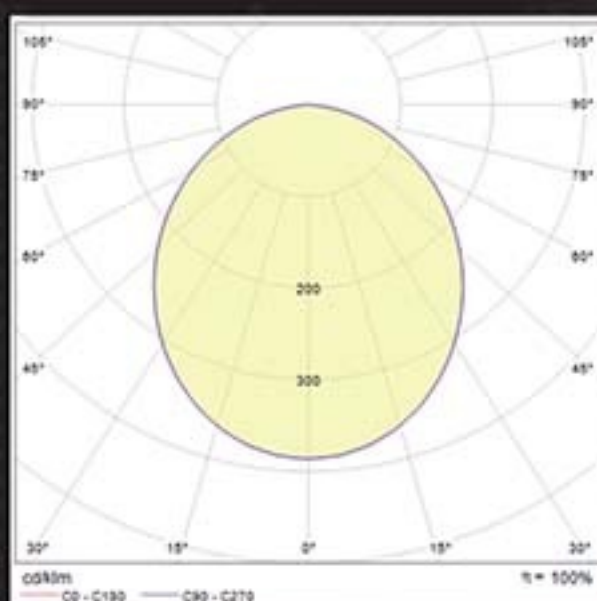

Wattage	Product Description	CCT	Lumen Output	Cut Out Dimension (mm)	Dimension (DxH) mm	Product Code
9W	LED Down Light	3000K	675lm	Ø 95	114 x 49.5	NNNC7581488
	LED Down Light	4000K	675m	Ø 95	114 x 49.5	NNNC7586488
	LED Down Light	6500K	675lm	Ø 95	114 x 49.5	NNNC7596488
12W	LED Down Light	3000K	900m	Ø 125	144 x 55	NNNC7581588
	LED Down Light	4000K	900m	Ø 125	144 x 55	NNNC7586588
	LED Down Light	6500K	900lm	Ø 125	144 x 55	NNNC7596588
15W	LED Down Light	3000K	1125lm	Ø 150	169 x 55	NNNC7581888
	LED Down Light	4000K	1125lm	Ø 150	169 x 55	NNNC7586888
	LED Down Light	6500K	1125lm	Ø 150	169 x 55	NNNC7596888
18W	LED Down Light	3000K	1350lm	Ø 175	194 x 55	NNNC7581688
	LED Down Light	4000K	1350lm	Ø 175	194 x 55	NNNC7586688
	LED Down Light	6500K	1350lm	Ø 175	194 x 55	NNNC7596688