


## DIFFUSE TYPE DOWN LIGHT

Recess mounted Circular type LED Down Light in white finish with energy efficient electronic driver.

- Input Voltage: AC 220 - 240V, 50/60Hz
- Optics: Polycarbonate diffuser
- High Surge Protection 1.0 KV
- Driver Type: Integral
- LED Life: 30,000 BH
- CRI: Ra>80
- P.F ≥ 0.5

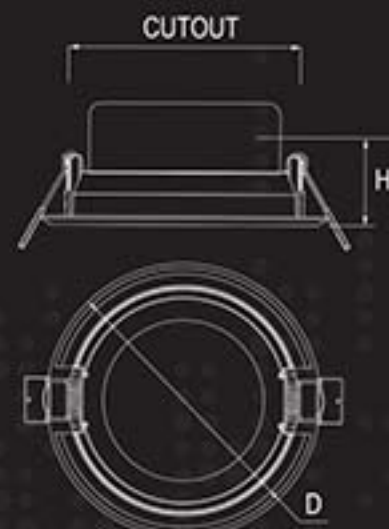


D = Diameter H = Height

### Application areas

General Shops Small Offices Reception Area Homes

Restaurants Hospital Lobbies & Passages




| Wattage | Product Description | CCT   | Lumen Output | Cut Out Dimension (mm) | Dimension (LxWxH) mm | Product Code |
|---------|---------------------|-------|--------------|------------------------|----------------------|--------------|
| 5W      | LED Down Light      | 3000K | 350lm        | 70 mm                  | 86 x 86 x 46         | PDLM12053    |
|         | LED Down Light      | 6000K | 350lm        | 70 mm                  | 86 x 86 x 46         | PDLM12056    |

## LENS TYPE DOWN LIGHT

Recess mounted Circular type LED Down Light in white finish with energy efficient electronic driver.

- Input Voltage: AC 220 - 240V, 50/60Hz
- Optics: Polycarbonate Lens
- High Surge Protection 1.0 KV
- Driver Type: Integral
- LED Life: 30,000 BH
- CRI: Ra>80
- P.F ≥ 0.5

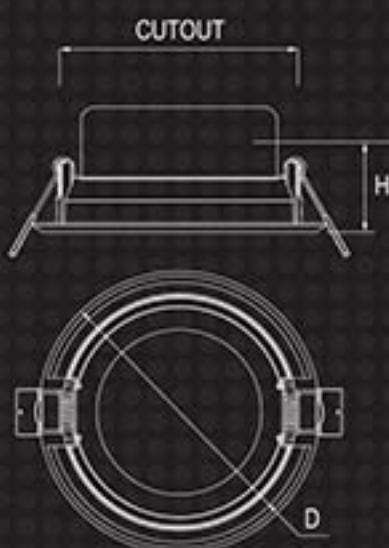


D = Diameter H = Height

### Application areas

General Shops Small Offices Reception Area Homes

Restaurants Hospital Lobbies & Passages



| Wattage | Product Description | CCT   | Lumen Output | Cut Out Dimension (mm) | Dimension (LxWxH) mm | Product Code |
|---------|---------------------|-------|--------------|------------------------|----------------------|--------------|
| 5W      | LED Down Light      | 3000K | 350lm        | 70 mm                  | 86 x 86 x 46         | PDLM13053    |
|         | LED Down Light      | 6000K | 350lm        | 70 mm                  | 86 x 86 x 46         | PDLM13056    |



## LED DOWN LIGHT

Recess mounted Circular type LED Down Light in white finish with energy efficient electronic driver.

- Input Voltage: AC 220-240V, 50/60Hz
- Driver Type: Integral
- P.F  $\geq 0.6$
- High Surge Protection: 1.0 KV
- CRI: Ra $>80$
- LED Life: 15,000 BH
- Optics: Polycarbonate diffuser

### Application areas



General Shops

Small Offices

Homes

Restaurants

Hospital Lobbies & Passages

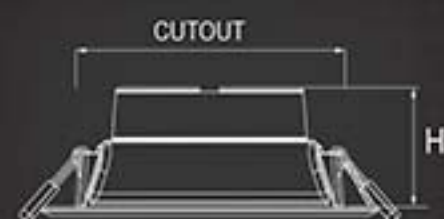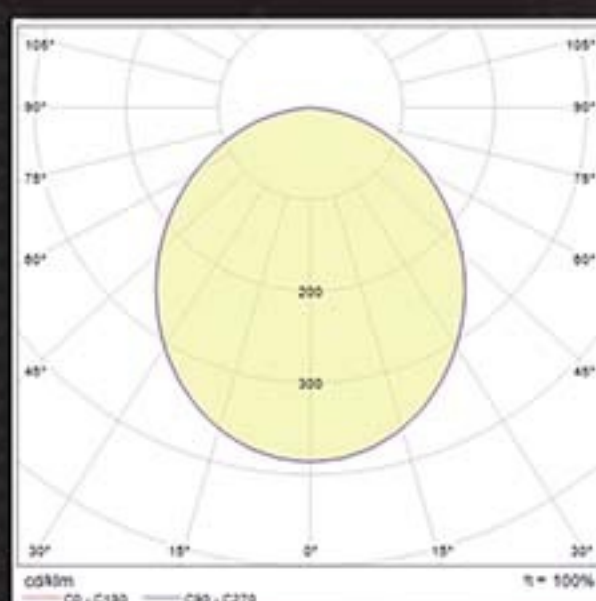

D = Diameter H = Height

| Wattage | Product Description | CCT   | Lumen Output | Cut Out Dimension (mm) | Dimension (DxH) mm | Product Code |
|---------|---------------------|-------|--------------|------------------------|--------------------|--------------|
| 9W      | LED Down Light      | 3000K | 675lm        | Ø 95                   | 114 x 49.5         | NNNC7581488  |
|         | LED Down Light      | 4000K | 675m         | Ø 95                   | 114 x 49.5         | NNNC7586488  |
|         | LED Down Light      | 6500K | 675lm        | Ø 95                   | 114 x 49.5         | NNNC7596488  |
| 12W     | LED Down Light      | 3000K | 900m         | Ø 125                  | 144 x 55           | NNNC7581588  |
|         | LED Down Light      | 4000K | 900m         | Ø 125                  | 144 x 55           | NNNC7586588  |
|         | LED Down Light      | 6500K | 900lm        | Ø 125                  | 144 x 55           | NNNC7596588  |
| 15W     | LED Down Light      | 3000K | 1125lm       | Ø 150                  | 169 x 55           | NNNC7581888  |
|         | LED Down Light      | 4000K | 1125lm       | Ø 150                  | 169 x 55           | NNNC7586888  |
|         | LED Down Light      | 6500K | 1125lm       | Ø 150                  | 169 x 55           | NNNC7596888  |
| 18W     | LED Down Light      | 3000K | 1350lm       | Ø 175                  | 194 x 55           | NNNC7581688  |
|         | LED Down Light      | 4000K | 1350lm       | Ø 175                  | 194 x 55           | NNNC7586688  |
|         | LED Down Light      | 6500K | 1350lm       | Ø 175                  | 194 x 55           | NNNC7596688  |